

Smad

SMAD ELECTRIC APPLIANCES CO.,LTD.
NO.2 Heilongjiang South Road, Shibei District, Qingdao, China

Website: https://www.smadgroup.com

Email: info@smad.com.cn
Tel: +86532-86101152
Fax: +86532-86101153










2023 Food & Restaurant Equipment for North America



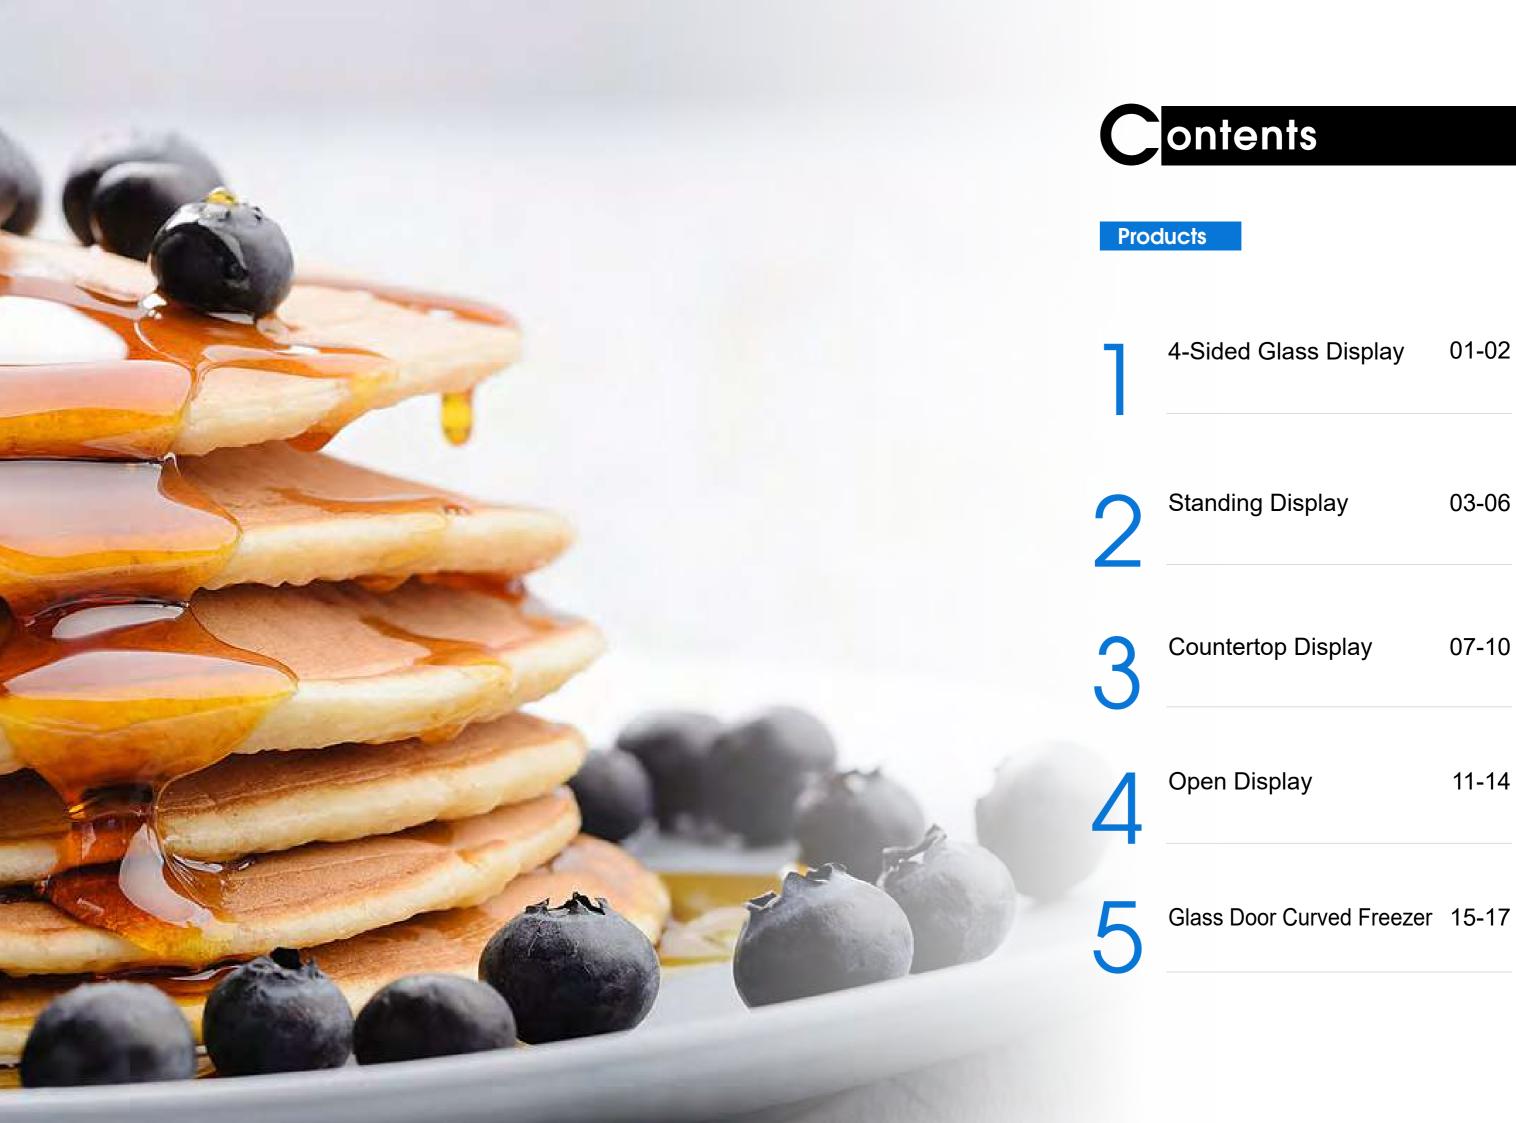

company Profile

Higher Quality Better Life

Qingdao Smad Electric Appliances Co., Ltd. (SMAD) was established in 1999. After many years of hard work, we have become a normalized and professional enterprise. Now SMAD has a staff of 600 persons and an annual output of 350 million Yuan. One sole proprietorship factory and two joint venture factories which are equipped with top-level production equipment and testing facilities can provide support for us.

Company Culture

At SMAD we work as a close-knit family, not only within ourselves but also with our clients. We believe that unity and teamwork make the path for our success. Our mutual trust fosters a culture that embraces curiosity and challenges, which allows us to exceed our clients expectations and succeed in every way.

Our Vision

To be the top manufacturer and exporter of electric home appliances, offering high quality products developed by creative thinking to ensure customers' total satisfaction.

Social Responsibility

Smad is a great place to work. We care about our people and think about our employees as partners to cultivate the full potential of them and encourage them to pursue work-life balance.

We believe in the coexistence of humans and nature to reach the productive harmony, capable of fulfilling social and economic requirements for present and future generations.

Our Mission

We are customer-centric and create a future growth market. We encourage and demand in-depth development and responsible actions. We are always one step ahead of the competition.

4-Sided Glass Display

CREATE YOUR LIFE

Global Leading Brand For Commercial Refrigeration Equipment

01-02



4-Sided Glass Display





Model	DSS-550WBR	DSS-400WBR
Capacity(Cu.Ft.)	19.4	14.1
Temerature Range	0-10/12℃ (32-50/53.6 °F)	0-10/12°C (32-50/53.6 °F)
Rated Input Power	500W	495W
Frigerant	R134a / R290	R134a / R290
Type of Climate	4	4
Product Dimentions(inch)	33.5×25.6×75.1	25.6×25.6×75.1
Packaging Dimentions(inch)	37.4×29.5×81.1	29.5×29.5×81.1
Weight(Net/Gross)(lbs)	423.3/463	385.8/418.9
Loading (40HQ)(pcs)	36	45





Model	DSS-270WBR	DDS-78R(1R)
Capacity(Cu.Ft.)	9.5	2.9
Temerature Range	0-10/12°C (32-50/53.6 °F)	0-12℃ (32-53.6 °F)
Rated Input Power	475W	180W
Frigerant	R134a / R290	R134a/R600a
Type of Climate	4	4
Product Dimentions(inch)	25.6×25.6×59.1	16.7×15.9×38.6
Packaging Dimentions(inch)	29.5×29.5×65.0	18.9×17.7×40.7
Weight(Net/Gross)(lbs)	308.6/339.5	79.4/84.9
Loading (40HQ)(pcs)	45	238

Standing Display

CREATE YOUR LIFE

Global Leading Brand For Commercial Refrigeration Equipment

03-06



Display Case

Standing Display







Model	DMS-570WBR(Y)	DDS-470WBR(Y)
Capacity(Cu.Ft.)	21.2	17.7
Temerature Range	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)
Rated Input Power	500W	500W
Frigerant	R134a / R290	R134a / R290
Type of Climate	4	4
Product Dimentions(inch)	71.5×26.6×48.0	59.6×26.6×48.0
Packaging Dimentions(inch)	74.8×29.3×50.0	63.0×29.3×50.0
Weight(Net/Gross)(lbs)	518.1/564.4	401.2/507.1
oading (40HQ)(pcs)	36	46





Model	DDS-370WBR(Y)	DDS-270WBR(Y)
Capacity(Cu.Ft.)	14.1	10.4
Temerature Range	2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)
Rated Input Power	480W	480W
Frigerant	R134a / R290	R134a / R290
Type of Climate	4	4
Product Dimentions(inch)	47.8×26.6×48.0	36.0×26.6×48.0
Packaging Dimentions(inch)	52.2×30.1×50.4	40.4×30.1×50.4
Weight(Net/Gross)(lbs)	341.7/414.5	297.6/339.5
Loading (40HQ)(pcs)	50	68





DDS-500WBR(L)	DDS-400WBR(L)
22.9	17.6
2-8°C (35.6-46.4 °F)	2-8°C (35.6-46.4 °F)
480W / 490W	480W / 490W
R134a / R290	R134a / R290
4	4
47.2×31.7×56.9	35.4×31.7×56.9
51.2×35.2×65.4	39.4×35.2×65.4
418.9/485	352.7/396.8
21	24
	22.9 2-8°C (35.6-46.4 °F) 480W / 490W R134a / R290 4 47.2×31.7×56.9 51.2×35.2×65.4 418.9/485





DD3 300WDR(L)	DMS-571WBR(Y)
12.3	23.0
2-8°C (35.6-46.4 °F)	0-12°C (32-53.6 °F)
480W	600W
R134a / R290	R134a / R290
4	4
25.6×31.7×56.9	71.6×26.8×55.9
29.5×35.2×65.4	74.8×29.3×57.9
297.6/348.3	518.1/617.3
38	14
	2-8°C (35.6-46.4 °F) 480W R134a / R290 4 25.6×31.7×56.9 29.5×35.2×65.4 297.6/348.3

Standing Display




Model	DDS-371WBR(Y)
Capacity(Cu.Ft.)	14.8
Temerature Range	2-8°C (35.6-46.4 °F)
Rated Input Power	540W
Frigerant	R134a / R290
Type of Climate	4
Product Dimentions(inch)	48.2×26.8×55.9
Packaging Dimentions(inch)	53.1×31.1×62.6
Weight(Net/Gross)(lbs)	390.2/467.4
Loading (40HQ)(pcs)	23



Model	DDS-271WBR(Y)
Capacity(Cu.Ft.)	10.9
Temerature Range	2-8°C (35.6-46.4 °F)
Rated Input Power	525W
Frigerant	R134a / R290
Type of Climate	4
Product Dimentions(inch)	36.4×26.8×55.9
Packaging Dimentions(inch)	41.3×31.1×62.6
Weight(Net/Gross)(lbs)	321.9/385.8
Loading (40HQ)(pcs)	30



Countertop Display







Model	DSS-400WBR(R)	DDS-201WBR
Capacity(Cu.Ft.)	12.7	7.1
Temerature Range	2-8°C (35.6-46.4 °F)	0-12°C (32-53.6 °F)
Rated Input Power	480W	400W
Frigerant	R134a/R600a	R134a / R600a / R290
Type of Climate	4	4
Product Dimentions(inch)	26.8×26.8×68.9	47.9×23.2×27.0
Packaging Dimentions(inch)	29.5×29.5×76.0	50.9×25.3×28.9
Weight(Net/Gross)(lbs)	280/308.6	186.3/191.8
Loading (40HQ)(pcs)	45	81





Model	DDS-130WBR(2)	DDS-185WAR
Capacity(Cu.Ft.)	4.6	6.5
Temerature Range	0-12℃ (32-53.6 °F)	0-12℃ (32-53.6 °F)
Rated Input Power	230W	278W
Frigerant	R134a / R600a	R134a / R600a
Type of Climate	4	4
Product Dimentions(inch)	31.4×23.2×27.0	41.3×25.4×25.2
Packaging Dimentions(inch)	34.4×25.3×28.9	44.5×28.0×27.6
Weight(Net/Gross)(lbs)	145.5/149.9	136.7/147.7
Loading (40HQ)(pcs)	132	96







Model	DDS-160WBR	DDS-120WBR
Capacity(Cu.Ft.)	5.7	4.2
Temerature Range	0-12°C (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	230W	230W
Frigerant	R134a / R600a	R134a / R600a
Type of Climate	4	4
Product Dimentions(inch)	34.6×22.4×27.0	27.6×22.4×27
Packaging Dimentions(inch)	37.4×24.7×28.9	30.4×24.7×28.9
Weight(Net/Gross)(lbs)	145.5/153.2	125.6/132.3
Loading (40HQ)(pcs)	126	162






Model	DMS-125WBR	DDS-105WBR
Capacity(Cu.Ft.)	4.4	3.5
Temerature Range	0-12℃ (32-53.6 °F)	0-12°C (32-53.6 °F)
Rated Input Power	230W	160W
Frigerant	R134a / R600a	R134a / R600a
Type of Climate	4	4
Product Dimentions(inch)	27.6×22.4×27	27.4×18.5×27
Packaging Dimentions(inch)	30.4×24.7×28.9	30.5×21.5×29.9
Weight(Net/Gross)(lbs)	119.0/123.5	117.9/125.7
Loading (40HQ)(pcs)	162	204



Model	DDS-100WR		
Capacity(Cu.Ft.)	3.5		
Temerature Range	0-12°C (32-53.6 °F)		
Rated Input Power	160W		
Frigerant	R134a / R600a		
Type of Climate	4		
Product Dimentions(inch)	26.9×17.7×26.6		
Packaging Dimentions(inch)	29.8×20.6×29.9		
Weight(Net/Gross)(lbs)	86.2/93.7		
Loading (40HQ)(pcs)	189		

Countertop Display

Global Leading Brand For Commercial Refrigeration Equipment

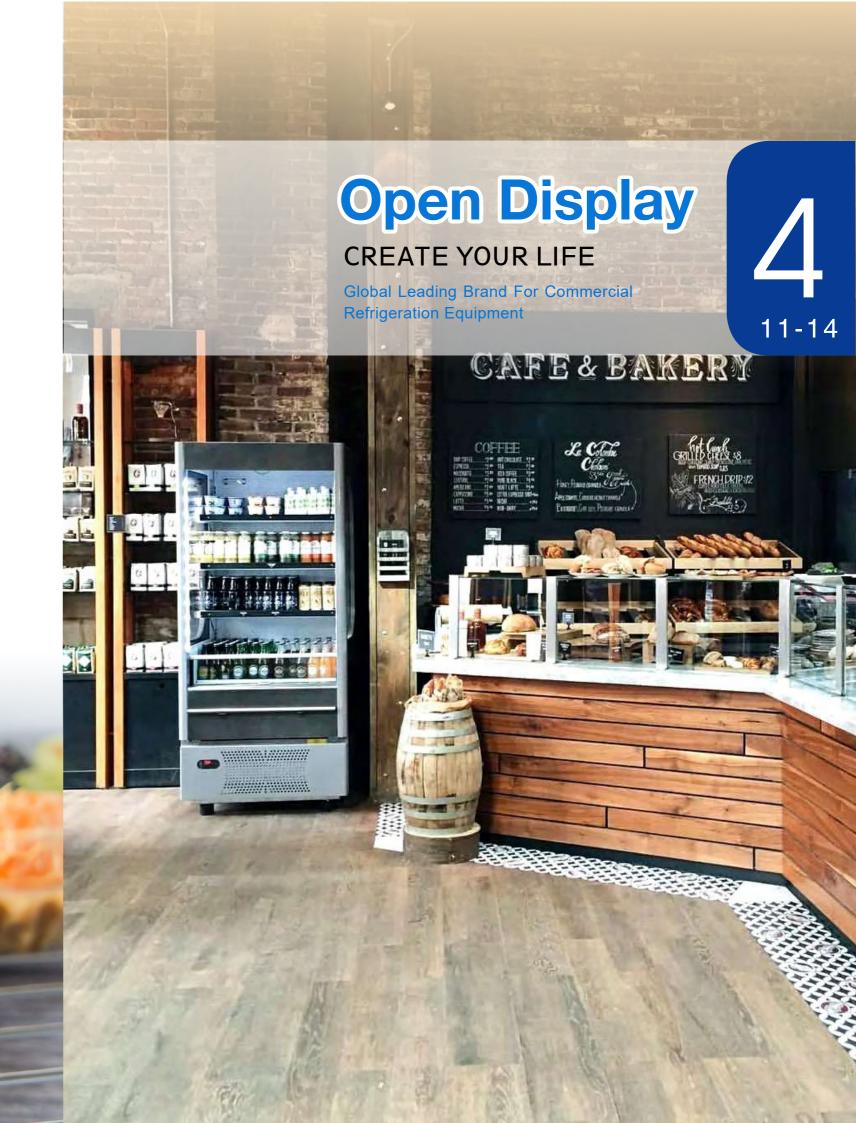

Open Display

Open Display



Model	DOS-360WR		
Capacity(Cu.Ft.)	12.7		
Temerature Range	2-10°C (35.6-50 °F)		
Rated Input Power	1400W		
Frigerant	R404a/R290		
Type of Climate	4		
Product Dimentions(inch)	34.5×37.2×65.2		
Packaging Dimentions(inch)	40.2×37.0×66.1		
Weight(Net/Gross)(lbs)	275.6/319.7		
Loading (40HQ)(pcs)	24		



Model	DOS-390WLR	
Capacity(Cu.Ft.)	11.3	
Temerature Range	2-10°C (35.6-50 °F)	
Rated Input Power	1400W	
Frigerant	R404a/R290	
Type of Climate	4	
Product Dimentions(inch)	36.1×31.2×57.4	
Packaging Dimentions(inch)	39.0×34.6×63.0	
Weight(Net/Gross)(lbs)	287.7/337.3	
Loading (40HQ)(pcs)	24	



DOS-250WBR	
8.8	
2-10℃ (35.6-50 °F)	
1340W	
R404a/R290	
6	
24.0×29.7×67.1	
27.2×29.7×74.4	
220.1/242.5	
44	



Model	DOS-220WBR	
Capacity(Cu.Ft.)	7.8	
Temerature Range	2-10°C (35.6-50 °F)	
Rated Input Power	1340W	
Frigerant	R404a / R290	
Type of Climate	6	
Product Dimentions(inch)	19.4×26.5×68.6	
Packaging Dimentions(inch)	22.2×28.3×75.5	
Weight(Net/Gross)(lbs)	211.6/233.7	
Loading (40HQ)(pcs)	64	



Model	DOS-180WBR		
Capacity(Cu.Ft.)	6.4		
Temerature Range	2-10℃ (35.6-50 °F)		
Rated Input Power	1340W		
Frigerant	R404a / R290		
Type of Climate	6		
Product Dimentions(inch)	19.4×26.5×57.1		
Packaging Dimentions(inch)	22.2×28.3×63.8		
Weight(Net/Gross)(lbs)	180.8/199.5		
Loading (40HQ)(pcs)	64		


Open Display

Global Leading Brand For Commercial Refrigeration Equipment





Glass Door Curved Freezer







Model	DDH-460X	DDH-360X	DDH-260X
Capacity(Cu.Ft.)	16.2	12.7	9.2
Temerature Range	≤ -18°C	≤ -18°C	≤ -18°C
Frigerant	R290	R290	R290
Type of Climate	N/ST	N/ST	N/ST
Product Dimentions(inch)	60.2×27.8×34.4	49.6×27.8×34.4	39×27.8×34.4
Packaging Dimentions(inch)	63.2×29.9×37.4	52.4×29.9×37.4	41.7×29.9×37.4
Weight(Net/Gross)(lbs)	172/196.2	152.1/180.8	121.3/143.3
Loading (40HQ)(pcs)	58	73	90



Model	DDC-359X	DDC-293X	DDC-262X
Capacity(Cu.Ft.)	12.7	10.3	9.3
Temerature Range	≤ -18°C	≤ -18°C	≤ -18°C
Frigerant	R290	R290	R290
Type of Climate	N/ST	N/ST	N/ST
Product Dimentions(inch)	56.1×23.9×33.1	47.4×23.9×33.1	38.7×23.9×33.1
Packaging Dimentions(inch)	58.3×25.8×34.8	49.6×25.8×34.8	40.6×25.8×34.8
Weight(Net/Gross)(lbs)	147.7/165.3	127.9/143.3	116.8/132.3
Loading (40HQ)(pcs)	78	83	108
		-	







Model	DDC-165X	DDH-160X
Capacity(Cu.Ft.)	5.8	5.7
Temerature Range	≤ -18°C	≤ -18°C
Frigerant	R290	R290
Type of Climate	N/ST	N/ST
Product Dimentions(inch)	30.3×23.9×33.1	26.2×27.8×34.4
Packaging Dimentions(inch)	32.5×25.8×34.8	28.9×29.9×37.4
Weight(Net/Gross)(lbs)	94.8/108	101.4/123.5
Loading (40HQ)(pcs)	150	132
		_

Glass Door Curved Freezer

